

NVT-3/9 Oven/Proofer



SIZE:

NVT-3/9

77-3/4" High, 36-1/8" Wide, 31" Deep

1975 mm High, 918 mm Wide, 787 mm Deep

OVEN FEATURES:

- Sleek new look
- Dual pane cool-to-the-touch oven door. Matching surface mounted proofer door.
- Increased oven wattage from 4000 to 5000 watts
- Best-in-class airflow system
- Welded stainless steel
- Heating elements easily accessible
- Fully insulated
- Magnetic handles
- Gasket is face mounted and easily replaceable
- **AUTOMIST®** Proofer
- Removable drip trough
- 12 Volt Halogen lights
- Relocated proofer components to the back enables easy cleaning of proofer bottom

PROGRAMMABLE CONTROLS:

- Touch screen controls
- Simple pre-set menus
- Multiple Proofer timers
- Controls angled for improved viewing
- Multi-lingual

WATER FILTER:

- Recessed water filter reduces the overall depth dimension by 2"
- Easy to change filter cartridge

ACTUAL RELATIVE HUMIDITY CONTROL:

- Automatically maintains humidity set point

INNOVATIVE RACK DESIGN:

- Cutout toward front allows for removing pans without damaging product
- Additional cross members for added support

NU-VU NVT-3/9 Oven/Proofer




LABORATORY CERTIFICATION AND APPROVAL
2 YEAR PARTS AND LABOR WARRANTY




NU-VU® Food Service Systems

www.nu-vu.com
5600 13th Street
Menominee, MI 49858


1-800-338-9886 Toll Free
1-906-863-4401 Phone
1-906-863-5889 Fax

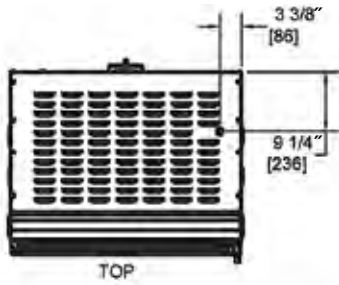


TOP

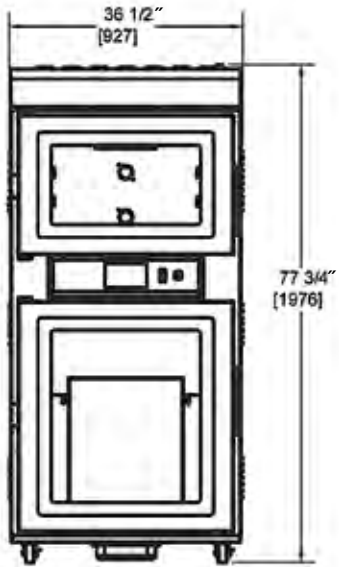

FRONT

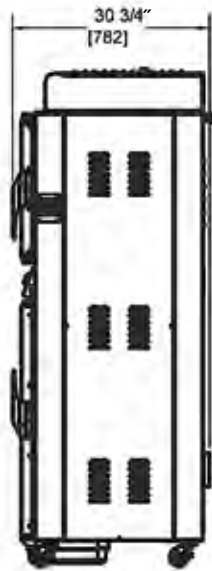

SIDE

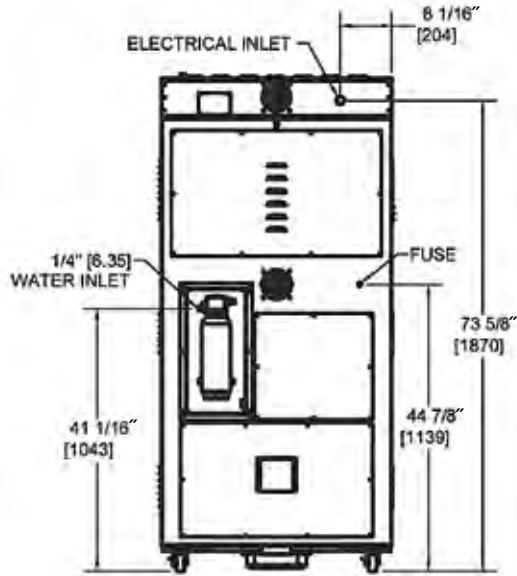

BACK

ELECTRICAL:

VOLTAGE & PHASE	MODEL #	AVAILABLE	AMP DRAW	SEPARATE NEUTRAL REQUIRED
U.S. & CANADA				
208v 1 PHASE	NVT-3/9	YES	32	NO
208v 3 PHASE	NVT-3/9	YES	21	NO
240v 1 PHASE	NVT-3/9	YES	28	NO
240v 3 PHASE	NVT-3/9	YES	18	NO
INTERNATIONAL				
220v 1 PHASE	NVT-3/9	YES	26	NO
220v 3 PHASE	NVT-3/9	YES	16.5	NO
230v 1 PHASE	NVT-3/9	YES	27	NO
230v 3 PHASE	NVT-3/9	YES	17.5	NO
380v 1 PHASE	NVT-3/9	YES	20	YES
380v 3 PHASE	NVT-3/9	YES	14	YES
415v 1 PHASE	NVT-3/9	YES	19	YES
415v 3 PHASE	NVT-3/9	YES	13	YES

CAPACITY:

Sheet Pans	13"x18"	18"x26"	Spacing
Oven	6	3	4-1/2"
Proofer	18	9	3-1/2"

DIMENSIONS:

	Height	Width	Depth
Exterior	77-3/4"	36-1/2"	30-3/4"
Interior			
Oven	14-1/2"	26"	18-1/2"
Proofer	33-3/8"	26"	18-1/2"

INSTALLATION:

Allow four inches on each side and back of unit.

DOOR SWING: Oven - 35-5/8" • Proofer - 35-5/8"

SHIPPING WEIGHT: 570 Pounds, FOB Menominee, MI 49858

WATTAGE:

OVEN: 5000 • PROOFER: 1200

SERVICE CONNECTIONS:

Unit is shipped from factory to be hardwired on site. 208 or 240 volt is standard. Please specify at time of order. A 1/4" waterline is required for proofer. Minimum water pressure specifications for the 1/4" water connection is 30 psi.

LISTINGS:

The NVT-3/9 has CUS & ETL Sanitation listings.



1-800-338-9886 Toll Free
1-906-863-4401 Phone
1-906-863-5889 Fax

NU-VU® Food Service Systems www.nu-vu.com
5600 13th Street Menominee, MI 49858